



Extreme Narrow Bezel 46" Multi LCD Monitor

BM-S4620E



* Side and angle views of the Front opening mechanism.

[Outside Dimension]

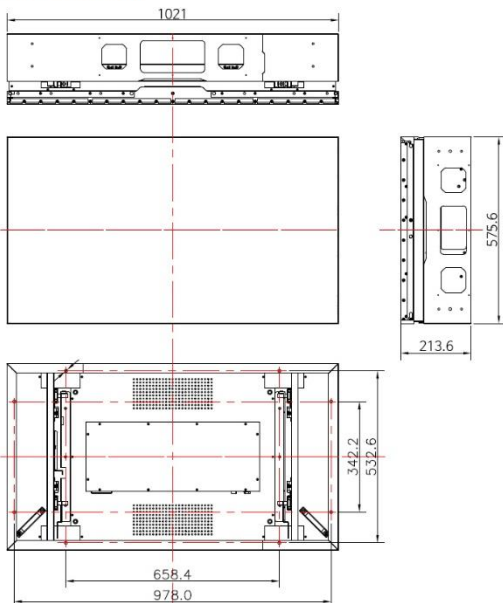

Model	BM-S4620E
LCD Screen Size	46" Diagonal
Resolution	1,920 X 1,080
Brightness	500cd/m'
Contrast Ratio	4,000 : 1
Frame (One Side, Bezel)	U/L(Bezel) : 1.15mm, R/B(Bezel) : 0.55mm
Viewing Angle	178° / 178° (Horizontal/Vertical)
Lifetime	50,000 Hours (Direct LED)
Features	Frame rate conversion, On-chip versatile OSD engine
High-Quality Advanced Scaling	Fully programmable zoom/shrink ratios Independent horizontal/vertical zoom and shrink Variable sharpness control
HDMI Input x2 / Output x1 Port(HDMI)	Support up to WUXGA(1,920 X 1,080 / 60Hz), Support up to HDTV signal(720p, 1080i)
Analog RGB Input/Output Port(15 pin D-sub female)	Support up to WUXGA(1,920 X 1,080 / 60Hz), Support up to HDTV signal(720p, 1080i)
Component Input/Output Port (BCN x3) (option)	Support up to HDTV signal(720p, 1080i)
Video Input/Output Port(BCN x1) (option)	Motion adaptive noise reduction-improve picture quality for off-air material Per-pixel motion adaptive de-interlacing Support to NTSC, PAL/SECAM
Auto Configuration and Auto Detection	Phase and image positioning, Input format detection Compatible with all graphic cards and standard VESA mode
System Control (RS-232) Input/Output Port(9pin D-sub)	Source Select, Magnification ratio change, Color, Brightness, Contrast, Picture Position -Up/Down/Left/Right, Function Reset LCD Panel Light On/Off Display Mode (TEXT/VIDEO)Set
Power Consumption	AC85V~243V, 50/60Hz 200W/Panel(LCD Panel + Scaler board)
Dimension	1,021 x 575.6 x 213.6 mm (H x V x D)
Weight	35kg (Pack 42kg)
Option	Tempered Glass, Camera, Touch Screen Mounting