


Main Features

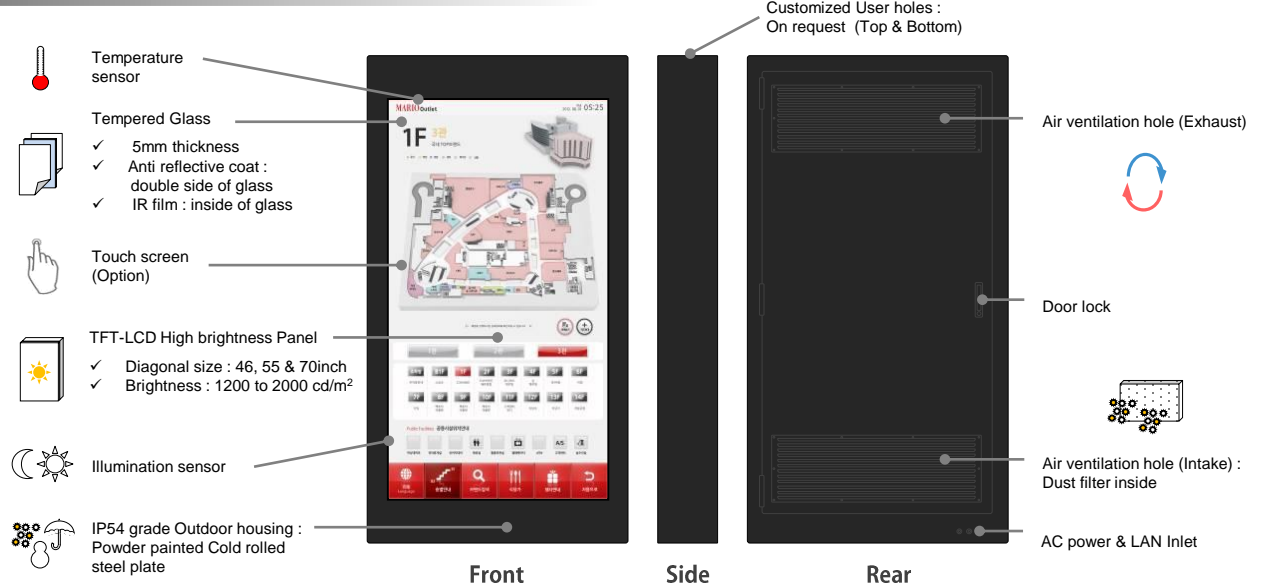

Specification table

Spec Category		46" 0 outdoor KIOSK	55" 0 outdoor KIOSK	70" 0 outdoor KIOSK
Model Number		BMK0-4601A	BMK0-5501A	BMK0-7001A
Screen	Size (Diagonal)	46inch TFT-LCD panel	55inch TFT-LCD panel	70inch TFT-LCD panel
	Resolution	1920 x 1080 pixels	←	←
	Brightness	1500 cd/m ²	1200 cd/m ²	1200 cd/m ²
	Contrast ratio	2,000:1 (Typ.), 10,000:1(DCR)	←	←
	Viewing angles	178° / 178° (Horizontal / Vertical)	←	←
Housing	Material	Powder coated surface treatment	←	←
	Glass	Tempered Glass, AntiReflection Glass	←	←
Embedded PC Specification		CPU : AMD A6-3600 2.1GHz VGA OUT/HDMI/PORT RAM : DDR3 2G , HDD/SSD 64G LAN : 1Gbps/WIFI	←	←
Input/Outputs		PC Input via 15-Pin Sub "D" 1 Composite Video Input 1 DVI : 720p/1080i/1080p RS-232C Female-to-Female Crossed Type External Speaker Out	←	←
Control Board		Auto Cooling System , Auto Heating System Auto Brightness Control (50~100%) Auto Power Control (FAN & LCD)	←	←
Color Capability		16.7 M (8-bit)	←	←
Dimming		50 ~ 100%	←	←
Power consumption	Average Power	500W	600W	800W
	Overall Physical	730(W) * 250(D) * 1460(H)mm	820(W) * 250(D) * 1650(H)mm	1015(W) * 250(D) * 1990(H)mm
KIOSK Weight per Unit		40kg	60kg	80kg
Ventilation		Yes (Internal Fan & External Fan & Heater)	←	←
Operating Temperature		-40°C ~ 50°C	←	←
Operating Humidity		20-80%	←	←
Run Time		Required 16 hrs x 7 days per week	←	←
Mounting		Top & Bottom (VESA Mounting Pattern)	←	←
Warranty Length		15 Months	←	←
Outdoor Features		IP54	←	←
Options	Touch screen	Film touch inside of tempered glass	←	←
	Motion sensor	R sensor	←	←
	Speaker	10W x 2 with volume adjustable Amp	←	←
	Webcam	5 Mega pixel USB type	←	←